

- 1-"SUPERTUFF" VINYL
- 2-STEEL UPRIGHT C/W FRONT COVER
- 3-FABRIC ROLL DRUM
- 4-BREAKAWAY BOTTOM BAR C/W "SUPEREDGE SENSOR"
- 5-THRESHOLD PHOTO EYE
- 6-MOTOR C/W BRAKE AND GEARBOX
- 7-NON METALLIC NEMA 4X CONTROL PANEL
- 8-1 PUSH BUTTON STATION C/W GREEN PUSH BUTTON AND RED EMERGENCY STOP
- 9-WIRELESS BOTTOM BAR CONTROLLER
- 10-MANUAL CRANK HANDLE

DOOR OPENING

_____ W x _____ H

QUANTITY: _____

POWER: _____ VOLTS _____ PHASE

SPEED ☐ SINGLE-32 ☐ DUAL-50 ☐ DUAL-100

MOTOR LOCATION ☐ LEFT ☐ RIGHT

CONTROL PANEL ☐ LEFT ☐ RIGHT

FABRIC COLOUR: _____

OPTIONS-ACTIVATION (CHECK DESIRED OPTIONS)

- ☐ FLOOR LOOP DETECTOR (WIRE BY OTHERS)
- ☐ PHOTO EYE QUANTITY _____ Pcs
- ☐ REFLECTIVE ☐ THRU-BEAM
- ☐ MOTION DETECTOR QUANTITY _____ Pcs
- ☐ RADIO CONTROL(STD. 2 TRANSMITTERS)
- ☐ SINGLE BUTTON ☐ MULTI-BUTTON _____ Pcs
- ☐ GREEN PUSH BUTTON STATION _____ Pcs
- ☐ EMERGENCY STOP STATION _____ Pcs
- ☐ PULL CORD QUANTITY _____ Pcs
- ☐ COMBO STATION-GREEN PUSH BUTTON STATION EMERGENCY STOP
- ☐ OTHER _____

OPTIONS-EXTRA REVERSING DEVICES (CHECK DESIRED OPTIONS)

- ☐ PHOTO EYE THRU-BEAM QUANTITY _____ Pcs
- ☐ FLOOR LOOP DETECTOR (WIRE BY OTHERS)

COMMUNICATION DEVICES

- ☐ BEACON WARNING LIGHT QUANTITY _____ Pcs
- ☐ HORN QUANTITY _____ Pcs
- ☐ TRAFFIC LIGHT QUANTITY _____ Pcs
- ☐ OTHER _____

OPTIONS DOOR (CHECK DESIRED OPTIONS)

- ☐ WINDOW
- ☐ FULL ☐ PARTIAL _____
- ☐ FABRIC ROLL CANOPY ☐ MOTOR CANOPY
- ☐ PAINTED ☐ GALVANIZED ☐ STAINLESS STEEL
- ☐ HOT DIP GALVANIZED UPRIGHTS AND BOTTOM BAR
- ☐ STAINLESS STEEL UPRIGHTS AND BOTTOM BAR
- ☐ PROJECTION FRAME _____
- ☐ OTHER _____

S.S. QUOTE REF. # _____

CUSTOMER _____

APPROVED BY: _____


P/O No.: _____

DATE: _____

SUPER SEAL

DOOR SERIES 8500 PLATINUM
CLEARANCE REQUIREMENTS

DATE: APR 09/07	SCALE: N.T.S.
DRAWN: AX	DWG NO: L85Pt / 1
APPROVED: ST	PART NO: N/A

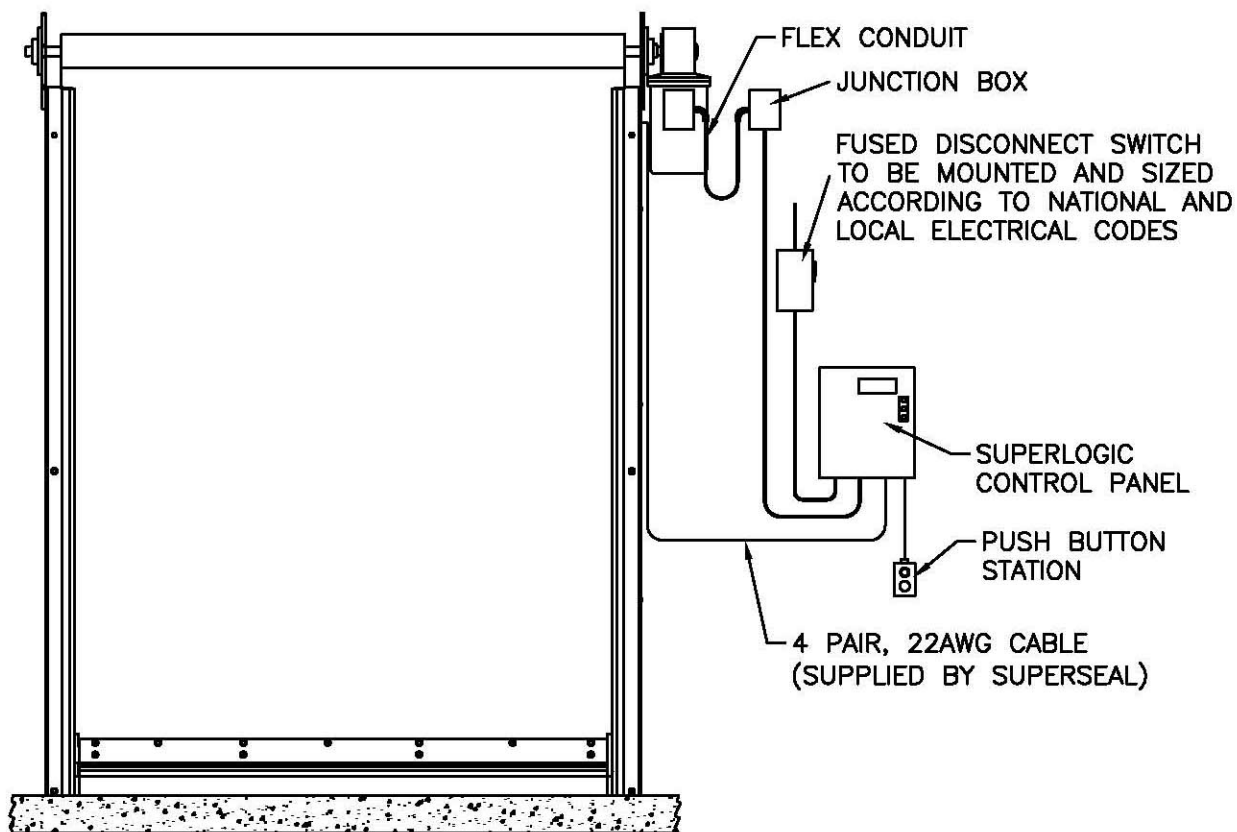

MAIN SUPPLY

- ☐ 208–240V, 3PH, 60Hz
- ☐ 460–480V, 3PH, 60Hz
- ☐ 575–600V, 3PH, 60Hz

RECOMMENDED FUSE SIZE

SUPERLOGIC III (SINGLE SPEED)

- ☐ 208–240V FUSE WITH 6A, TYPE CC
- ☐ 460–480V FUSE WITH 3A, TYPE CC
- ☐ 575–600V FUSE WITH 2.5A, TYPE CC

SUPERLOGIC III PLUS (DUAL SPEED)

- ☐ 208–240V FUSE WITH 15A, TYPE CC
- ☐ 460–480V FUSE WITH 8A, TYPE CC
- ☐ 575–600V FUSE WITH 6A, TYPE CC

NOTE

NOT SUPPLIED BY SUPERSEAL:

- ALL ANCHORING AND SPECIAL BRACKETS REQUIRED FOR INSTALLATION.
- ALL CONDUIT, WIRING, EXTERNAL DEVICE INSTALLATION AND LABOUR.
- WIRING UNLESS OTHERWISE SPECIFIED.
- FUSED DISCONNECT.



DOOR SERIES 8500 PLATINUM
TYPICAL WIRING LAYOUT

DATE: OCT 13/06	SCALE: N.T.S.
DRAWN: AX	DWG NO: L85PT / 2
APPROVED: G. ION	PART NO: N/A